


External Overhead/Underground drop cables

DESCRIPTION

1F G657A2 pre-terminated 3mm overhead and underground (OH/UG) drop cables eliminating the need to splice fibres allows for time-saving installations. Depending on length the cables are delivered on coils or reels with alternative connectors in both ends or with open end. PIA approved and suitable for max 68 m span lengths.

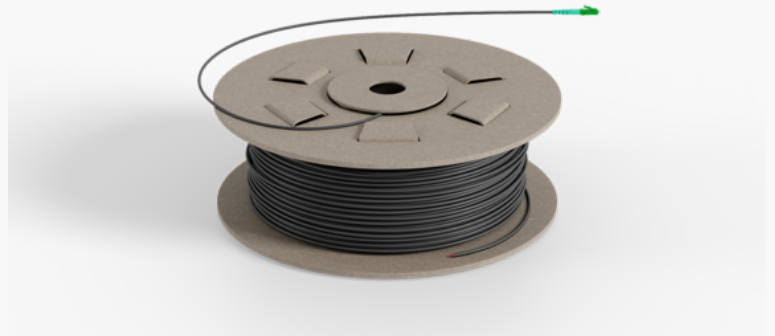

Product number	Product name
	External drop cable SC/APC-Open
	External drop cable LC/APC-Open
	External drop cable SC/APC-SC/APC
	External drop cable LC/APC-LC/APC

