


OH Cable ADSS CLT 2.5kN

Cables designed for a maximum of 70m span lengths (distance between poles) under ice and wind conditions according to NESC heavy. The cable is based on a central loose tube construction (CLT). Two strain reliefs made of fiberglass-reinforced plastic (FRP) are embedded in the cable sheath for best tensile strength performance.

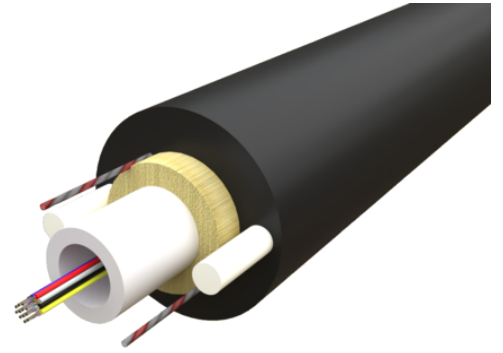

Product number	Product name	Fibre Count	Cable Diameter
87510102	2F G657A1 ADSS CT HDPE 2xFRP 2.5kN OD 7.6mm 2km/dr	2	7.6 mm
87510104	4F G657A1 ADSS CT HDPE 2xFRP 2.5kN OD 7.6mm 2km/dr	4	7.6 mm
87510112	12F G657A1 ADSS CT HDPE 2xFRP 2.5kN OD 7.6mm 2km/dr	12	7.6 mm