


## OH Cable ADSS MLT 15-20kN

Cables designed for a maximum of 150m span lengths (distance between poles) under ice and wind conditions according to NESC heavy. The cable is based on a multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

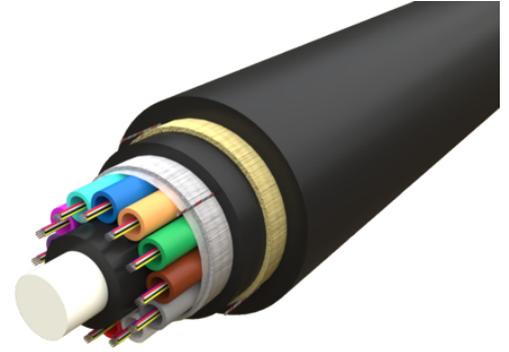

Product number	Product name	Fibre Count	Cable Diameter
4965257	24F G652D ADSS MLT Black HDPE 15kN OD 15,7mm 4km/dr	24	15.7 mm
4965267	48F G652D ADSS MLT Black HDPE 15kN OD 15,7mm 4km/dr	48	15.7 mm
4965277	96F G652D ADSS MLT Black HDPE 16kN OD 16mm 4km/dr	96	16 mm
4965287	144F G652D ADSS MLT Black HDPE 18kN OD 19,5mm 4km/dr	144	19.5 mm
4965297	192F G652D ADSS MLT Black HDPE 20kN OD 21,8mm 4km/dr	192	21.8 mm
4965307	288F G652D ADSS MLT Black HDPE 20kN OD 22mm 4km/dr	288	22 mm