


## Circuit integrity cables CLT

Fiber optic circuit integrity (fireproof) cables designed to function for at least 90 minutes in fires up to 750°C. Suitable for installation indoors and/or outdoors in ducts. Halogen-free, CPR and fire rated to meet the requirements for indoor installations. The construction with corrugated steel reinforcement makes the cable 100% rodent-proof.

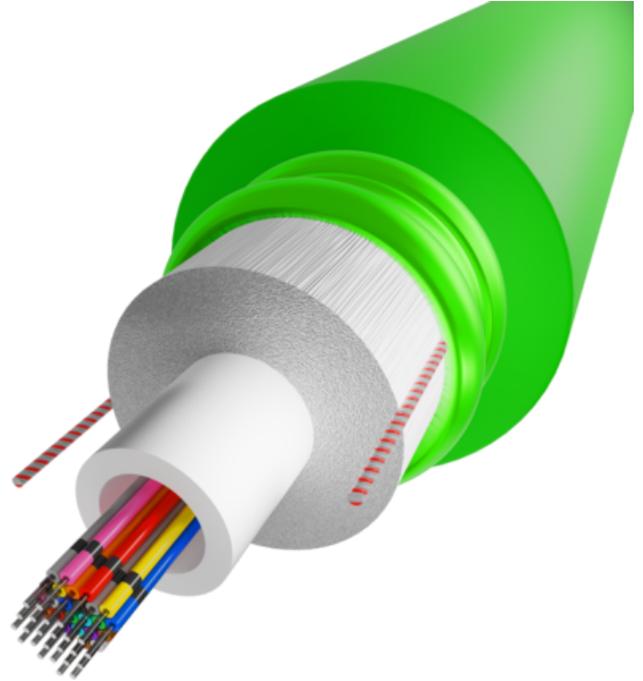

Product number	Product name	Fibre Count	Cable Diameter	CPR Classification
4704692	12F G657A1 CLT cable FSC90 Green LSZH Dca OD 8.9mm EIA/TIA T2000m	12	8.9 mm	Dca-s2, d2, a1
4704702	24F G657A1 CLT cable FSC90 Green LSZH Dca OD 8.9mm EIA/TIA T2000m	24	8.9 mm	Dca-s2, d2, a1