


Circuit integrity cables MLT

Fiber optic circuit integrity (fireproof) cables designed to function for at least 90 minutes in fires up to 750°C. Suitable for installation indoors and/or outdoors in ducts. Halogen-free, CPR and fire rated to meet the requirements for indoor installations. The construction with corrugated steel reinforcement makes the cable 100% rodent-proof.

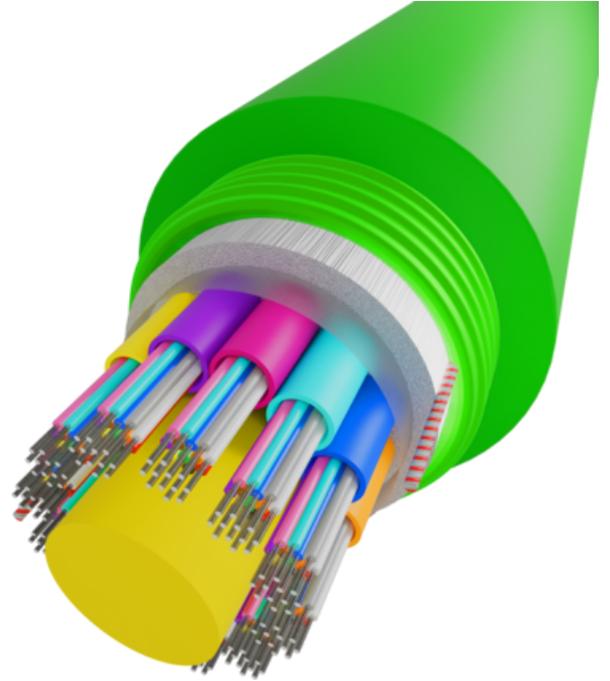

Product number	Product name	Fibre Count	Cable Diameter	CPR Classification
4704712	48F G657A1 MLT cable FSC90 Green LSZH Dca OD 15.1mm EIA/TIA T2000m	48	15.1 mm	Dca-s2, d1, a1
4704722	96F G657A1 MLT cable FSC90 Green LSZH Dca OD 15.1mm EIA/TIA T2000m	96	15.1 mm	Dca-s2, d1, a1
4704732	144F G657A1 MLT cable FSC90 Green LSZH Dca OD 15.1mm EIA/TIA T2000m	144	15.1 mm	Dca-s2, d1, a1