


<b>Product name</b>	4F SM G657A2 Microcable CLT Orange PA OD 2,0mm 4000m/dr
<b>Product code</b>	4963787
<b>GTIN</b>	7332811310928
<b>ETIM-Class</b>	EC000034

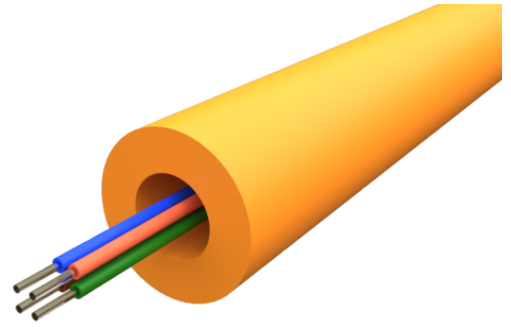

## PRODUCT SPECIFICATIONS

4F SM G657A2 Micro cable typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cables are based on a central loose tube construction (CLT).

## Measurements

<b>Length</b>	1,000 mm
<b>Height</b>	2 mm
<b>Width</b>	2 mm
<b>Weight</b>	5 g

## Physical Characteristics

<b>Fibre Count</b>	4
<b>Cable Construction</b>	Central Loose Tube (CLT)
<b>Fibre Type</b>	ITU-T G.657 A2
<b>Fibre Colour Sequence</b>	EIA/TIA-598A
<b>Tube Colour Sequence</b>	EIA/TIA-598A
<b>Outer Sheath Material</b>	PA (Polyamid)
<b>Colour of Cable Sheath</b>	Orange
<b>Cable Diameter</b>	2 mm
<b>Cable Diameter Tolerance</b>	+/- 0.1 mm

Nominal Cable Weight

5 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
Metal free	Yes
Tensile Strength (N) IEC-60794-1-21-E1	70 N
Crush Resistance - IEC- 60794-1-21-E3	100 N/10cm
Torsion IEC-60794-1-21-E7	± 180°
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	40 mm
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	30 mm
Water Penetration Test IEC-60794-1-22-F5	1m head, 3m samples, 24 hrs.
Drip Test IEC-60794-1-21-E14	30 cm, 70°C, 24 hr
Temperature Performance Installation IEC-60794-1-22-F1	-15°C till +50°C
Temperature Performance Operation IEC-60794-1-22-F1	-40°C till +70°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C till +70°C