


Micro Cable CLT 2.0-3.2 mm

Micro cables typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cables are based on a central loose tube construction (CLT).

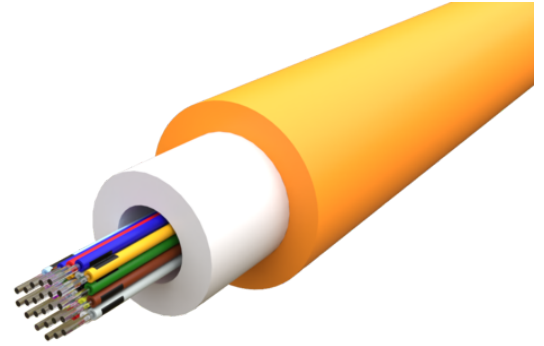

| Product number | Product name | Fibre Count | Cable Diameter | Fibre Colour Sequence |
|----------------|---|-------------|----------------|-----------------------|
| 5041624 | 2F SM G657A1 Microcable CLT Orange PBT OD 2,0mm 2100m/dr | 2 | 2 mm | EIA/TIA-598A |
| 5041625 | 4F SM G657A1 Microcable CLT Orange PBT OD 2,0mm 2100m/dr | 4 | 2 mm | EIA/TIA-598A |
| 5041627 | 12F SM G657A1 Microcable CLT Orange PBT OD 2,5mm 2100m/dr | 12 | 2.5 mm | EIA/TIA-598A |
| 5041628 | 24F SM G657A1 Microcable CLT Orange PBT OD 3,2mm 2100m/dr | 24 | 3.2 mm | EIA/TIA-598A |