


<b>Product name</b>	4F SM G657A1 Microcable CLT Black HDPE OD 3,7mm, 4km/dr
<b>Product code</b>	4985737
<b>GTIN</b>	7332811113154
<b>ETIM-Class</b>	EC000034

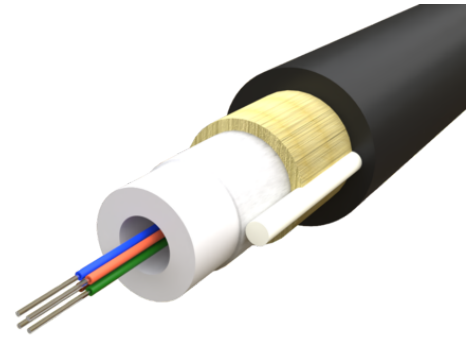

## PRODUCT SPECIFICATIONS

4F SM G657A1 Micro cable typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cables are based on a central loose tube construction (CLT). Two strain reliefs made of fiberglass-reinforced plastic (FRP) are embedded in the cable sheath for best tensile strength and blowing performance.

## Measurements

<b>Length</b>	1,000 mm
<b>Height</b>	3.7 mm
<b>Width</b>	3.7 mm
<b>Weight</b>	120 g

## Physical Characteristics

<b>Fibre Count</b>	4
<b>Cable Construction</b>	Central Loose Tube (CLT)
<b>Fibre Type</b>	ITU-T G.657 A1
<b>Fibre Colour Sequence</b>	EIA/TIA-598A
<b>Tube Size</b>	2.2 mm
<b>Central Strength Member</b>	2 x arp
<b>No of Tubes</b>	1
<b>Tube Colour Sequence</b>	EIA/TIA-598A

<b>Outer Sheath Material</b>	HDPE (High Density Polyethene)
<b>Colour of Cable Sheath</b>	Black
<b>Nominal Sheath Thickness</b>	0.7 mm
<b>Cable Diameter</b>	3.7 mm
<b>Cable Diameter Tolerance</b>	+/- 0.2 mm
<b>Nominal Cable Weight</b>	12 kg/km

## Mechanical & Environmental Characteristics

<b>Halogen Free</b>	Yes
<b>UV Proof</b>	Yes
<b>Tensile Strength (N) IEC-60794-1-21-E1</b>	100 N
<b>Crush Resistance - IEC- 60794-1-21-E3</b>	1,000 N/10cm
<b>Torsion IEC-60794-1-21-E7</b>	± 180°
<b>Min. Bend Radius (During Installation) IEC-60794-1-21-E11</b>	80 mm
<b>Min. Bend Radius (After Installation) IEC-60794-1-21-E11</b>	40 mm
<b>Water Penetration Test IEC-60794-1-22-F5</b>	1m head, 3m samples, 24 hrs.
<b>Drip Test IEC-60794-1-21-E14</b>	30 cm, 70°C, 24 hr
<b>Temperature Performance Installation IEC-60794-1-22-F1</b>	-15°C to +50°C
<b>Temperature Performance Operation IEC-60794-1-22-F1</b>	-40°C to +70°C
<b>Temperature Performance Storage IEC-60794-1-22-F1</b>	-40°C to +70°C