


## Micro Cable CLT 3.7 mm

Micro cables typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cables are based on a central loose tube construction (CLT). Two strain reliefs made of fiberglass-reinforced plastic (FRP) are embedded in the cable sheath for best tensile strength and blowing performance.

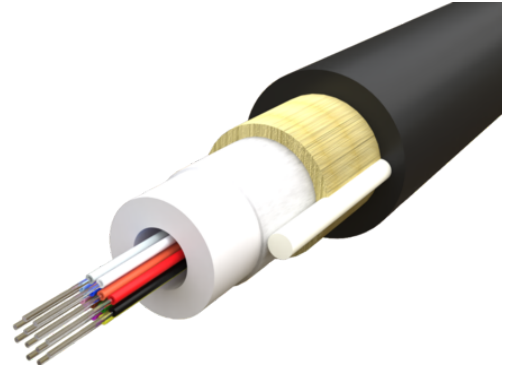

Product number	Product name	Fibre Count	Cable Diameter	Fibre Colour Sequence
4985727	2F SM G657A1 Microcable CLT Black HDPE OD 3,7mm, 4km/dr	2	3.7 mm	EIA/TIA-598A
4985737	4F SM G657A1 Microcable CLT Black HDPE OD 3,7mm, 4km/dr	4	3.7 mm	EIA/TIA-598A
4985757	12F SM G657A1 Microcable CLT Black HDPE OD 3,7mm, 4km/drum	12	3.7 mm	EIA/TIA-598A