


Micro Cable MLT slim 200µm

Micro cables typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cable is based on a slim multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

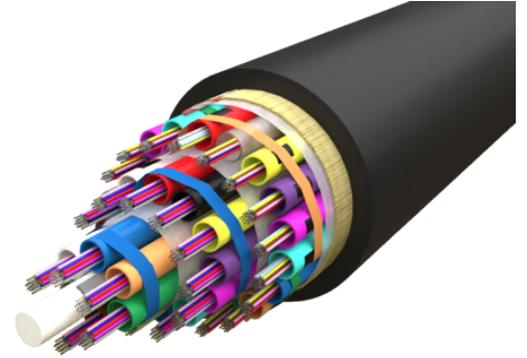

Product number	Product name	Fibre Count	Cable Diameter	Fibre Colour Sequence
4982817	96F G657A1 200µm Microcable MLT Black PA OD 5.9mm 4km/d	96	5.9 mm	EIA/TIA-598A
4985667	144F G657A1 200µm Microcable MLT Black PA OD 5.7mm 4km/d	144	5.7 mm	EIA/TIA-598A
4985677	192F G657A1 200µm Microcable MLT Black PA OD 6.7mm 4km/d	192	6.7 mm	EIA/TIA-598A
4985687	240F G657A1 200µm Microcable MLT Black PA OD 7.7mm 4km/d	240	7.7 mm	EIA/TIA-598A
4985697	288F G657A1 200µm Microcable MLT Black HDPE OD 8.0mm 4km/d	288	8 mm	EIA/TIA-598A
87703288	288F G657A1 200µm Micro Cable MLT Black HDPE OD 8.1mm 4km/d	288	8.1 mm	EIA/TIA-598A
4982837	432F G657A1 200µm Microcable MLT Black PA OD 8.8mm 4km/d	432	8.8 mm	EIA/TIA-598A
4982857	576F G657A1 200µm Microcable MLT Black PA OD 10.6mm 4km/d	576	10.6 mm	EIA/TIA-598A
87703576	576F G657A1 200µm Micro Cable MLT Black HDPE OD 10.2mm 4km/d	576	10.2 mm	EIA/TIA-598A