


<b>Product name</b>	4F Droptic cable 4.0mm G657A2 9/125 TB White LSZH Dca 250 mtr/box
<b>Product code</b>	4985574
<b>GTIN</b>	7332811361142
<b>ETIM-Class</b>	EC000034

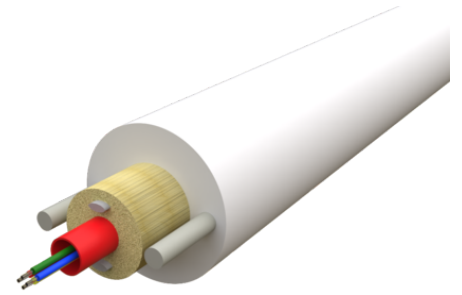

## PRODUCT SPECIFICATIONS

4F G657A2 cable typically used for indoor installation applications by pulling. Cable parameters such as cable flexibility, diameter and higher safety levels for fire and dangerous substances makes it optimized for safe and effective indoor installation.

## Measurements

<b>Length</b>	1,000 mm
<b>Height</b>	4 mm
<b>Width</b>	4 mm
<b>Weight</b>	17 g

## Physical Characteristics

<b>Fibre Count</b>	4
<b>Cable Construction</b>	Micro Module
<b>Fibre Type</b>	ITU-T G.657 A2
<b>Fibres per Tube</b>	4
<b>Tube Size</b>	0.9 mm
<b>Central Strength Member</b>	frp are embedded in the cable sheath
<b>No of Tubes</b>	1
<b>Tube Colour Sequence</b>	S12
<b>Outer Sheath Material</b>	LSZH (Low Smoke Zero Halogen)

Colour of Cable Sheath	White
Nominal Sheath Thickness	1 mm
No of Ripcords Below Outer Sheath	1
Cable Diameter	4 mm
Cable Diameter Tolerance	± 0.15 mm
Nominal Cable Weight	17.2 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
UV Proof	Yes
Metal free	Yes
CPR	Yes
CPR Classification	dca-s2, d1, a1
Tensile Strength (N) IEC-60794-1-21-E1	400 N
Crush Resistance - IEC- 60794-1-21-E3	1,500 N/10cm
Impact Strength (Nm) IEC-60794-1-21-E4	3 nm
Torsion IEC-60794-1-21-E7	20 cycles ; l = 1m ; load = 25 n ; ± 180° ; δα ≤ 0.1 db
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	20 mm
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	15 mm
Water Penetration Test IEC-60794-1-22-F5	compliant
Temperature Performance Installation IEC-60794-1-22-F1	+5°C to +45°C
Temperature Performance Operation IEC-60794-1-22-F1	-30°C to +70°C
Temperature Performance Storage IEC-60794-1-22-F1	-30°C to +70°C
Cable Length In Package	250 m