


<b>Product name</b>	288F G657A1 200µm Micro Cable MLT Black HDPE OD 8.1mm 4km/d
<b>Product code</b>	87703288
<b>GTIN</b>	7332811369964
<b>ETIM-Class</b>	EC000034

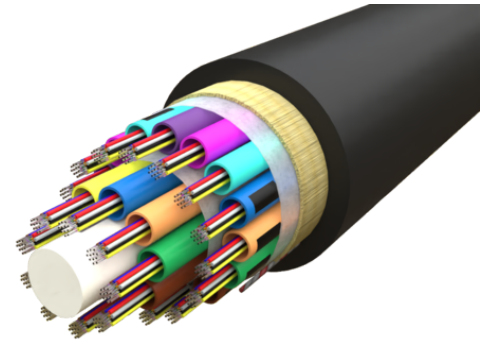

## PRODUCT SPECIFICATIONS

Micro cables typically used in outdoor microduct installation applications. The cables are suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction are optimized for best installation performance. The cable is based on a slim multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

## Measurements

<b>Length</b>	1,000 mm
<b>Height</b>	8.1 mm
<b>Width</b>	8.1 mm
<b>Weight</b>	60 g

## Physical Characteristics

<b>Fibre Count</b>	288
<b>Cable Construction</b>	Multi Loose Tube (MLT)
<b>Fibre Type</b>	ITU-T G.657 A1 200um
<b>Fibres per Tube</b>	12
<b>Fibre Colour Sequence</b>	EIA/TIA-598A
<b>Central Strength Member</b>	FRP
<b>No of Tubes</b>	Layer 1: 9 Layer 2: 15
<b>Tube Colour Sequence</b>	EIA/TIA-598A

<b>Outer Sheath Material</b>	HDPE (High Density Polyethene)
<b>Colour of Cable Sheath</b>	Black
<b>No of Ripcords Below Outer Sheath</b>	1
<b>Cable Diameter</b>	8.1 mm
<b>Cable Diameter Tolerance</b>	+/- 0.3mm
<b>Nominal Cable Weight</b>	60 kg/km

## Mechanical & Environmental Characteristics

<b>Halogen Free</b>	Yes
<b>UV Proof</b>	Yes
<b>Metal free</b>	Yes
<b>Tensile Strength (N) IEC-60794-1-21-E1</b>	1,000 N
<b>Crush Resistance - IEC- 60794-1-21-E3</b>	1,000 N/10cm
<b>Impact Strength (Nm) IEC-60794-1-21-E4</b>	1
<b>Torsion IEC-60794-1-21-E7</b>	± 360 °
<b>Min. Bend Radius (During Installation) IEC-60794-1-21-E11</b>	20 x d
<b>Min. Bend Radius (After Installation) IEC-60794-1-21-E11</b>	20 x d
<b>Water Penetration Test IEC-60794-1-22-F5</b>	1m head, 3m samples, 24 hrs.
<b>Drip Test IEC-60794-1-21-E14</b>	30 cm, 70°C, 24 hr
<b>Temperature Performance Installation IEC-60794-1-22-F1</b>	-5 °C to + 50 °C
<b>Temperature Performance Operation IEC-60794-1-22-F1</b>	-20 °C to + 70 °C
<b>Temperature Performance Storage IEC-60794-1-22-F1</b>	-20 °C to + 70 °C