


Product name	2F G657A1 TB cable White FRNC Dca OD 4mm EIA/TIA 1km/d
Product code	4702321
GTIN	7332811382444
ETIM-Class	EC000034

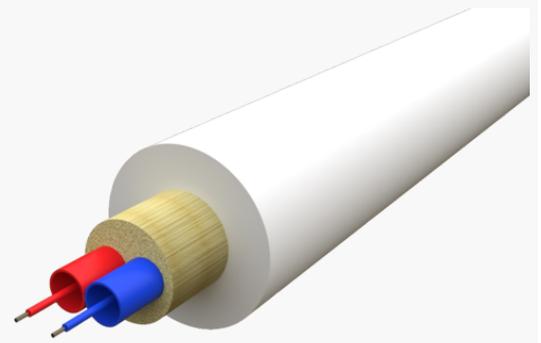

## PRODUCT SPECIFICATIONS

CPR rated cables typically used for indoor installation applications by pulling. Cable parameters such as cable flexibility, diameter and higher safety levels for fire and dangerous substances makes it optimized for safe and effective indoor installation.

The expected service life in normal use exceeds 30 years.

## Measurements

Length	1,000 mm
Height	4 mm
Width	4 mm
Weight	15 g

## Physical Characteristics

Fibre Count	2
Cable Construction	Tight Buffered (TB)
Fibre Type	ITU-T G.657 A1
Fibres per Tube	1
Fibre Colour Sequence	EIA/TIA-598A
Tube Size	0.9 mm
No of Tubes	2
Tube Colour Sequence	EIA/TIA-598A

Outer Sheath Material	FRNC (Flame Retardant Non-Corrosive)
Colour of Cable Sheath	White
No of Ripcords Below Outer Sheath	0
Cable Diameter	4 mm
Cable Diameter Tolerance	+/- 0.3 mm
Nominal Cable Weight	15 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
Halogen free - Standard	IEC 50290-2-27
UV Proof	Yes
UV Proof - Standard	IEC 50289-4-17 (method C)
Metal free	Yes
CPR	Yes
CPR Classification	Dca-s1a, d1, a1
Tensile Strength (N) IEC-60794-1-21-E1	400 N
Crush Resistance - IEC- 60794-1-21-E3	200 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	20 x OD
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	15 x OD
Water Penetration Test IEC-60794-1-22-F5	1m head, 3m samples, 24 hrs.
Temperature Performance Installation IEC-60794-1-22-F1	-5°C to +50°C (Max. change in attenuation shall be ≤ 0.15 dB/km)
Temperature Performance Operation IEC-60794-1-22-F1	-30°C to +70°C (Max. change in attenuation shall be ≤ 0.15 dB/km)
Temperature Performance Storage IEC-60794-1-22-F1	-40°C to +70°C (Max. change in attenuation shall be ≤ 0.15 dB/km)
Cable Length In Package	1,000 m