


<b>Product name</b>	1F G657A2 TB dual jacket cable Black/White OD 5/2.4mm EIA/TIA 1km/d
<b>Product code</b>	4702341-UK
<b>GTIN</b>	7332811382482
<b>ETIM-Class</b>	EC000034

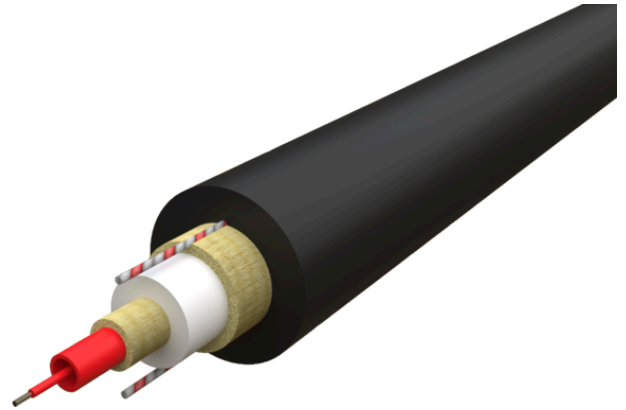

## PRODUCT SPECIFICATIONS

The cable has a black LSZH and UV-resistant outer jacket and a white FRNC and CPR Cca-s1a d0 a1 approved inner jacket. When entering the premises from the outside, the outer jacket is removed and the inner flame retardant jacket is exposed for further indoor installation.

## Measurements

<b>Length</b>	1,000 mm
<b>Height</b>	5 mm
<b>Width</b>	5 mm
<b>Weight</b>	20 g

## Physical Characteristics

<b>Fibre Count</b>	1
<b>Cable Construction</b>	Tight Buffered (TB)
<b>Fibre Type</b>	ITU-T G.657 A2
<b>Fibres per Tube</b>	1
<b>Fibre Colour Sequence</b>	EIA/TIA-598A
<b>Tube Size</b>	0.9 mm
<b>No of Tubes</b>	1
<b>Tube Colour Sequence</b>	EIA/TIA-598A
<b>Outer Sheath Material</b>	HDPE + FRNC

Double Sheath	Yes
Colour of Cable Sheath	Black & White
No of Ripcords Below Outer Sheath	2
Cable Diameter	5 mm
Cable Diameter Tolerance	± 0.2
Nominal Cable Weight	20 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
UV Proof	Yes
Metal free	Yes
CPR	Yes
CPR Classification	Cca-s1a, d0, a1
Tensile Strength (N) IEC-60794-1-21-E1	600 N
Crush Resistance - IEC- 60794-1-21-E3	1,000 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	20 x OD
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	15 x OD
Temperature Performance Installation IEC-60794-1-22-F1	-5°C to +50°C
Temperature Performance Operation IEC-60794-1-22-F1	-40°C to +70°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C to +70°C
Cable Length In Package	1,000 m