


## OH Cable ADSS MLT 4.3-6.2kN

Cables designed for a maximum of 70m span lengths (distance between poles) under ice and wind conditions according to NESC heavy. The cable is based on a multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

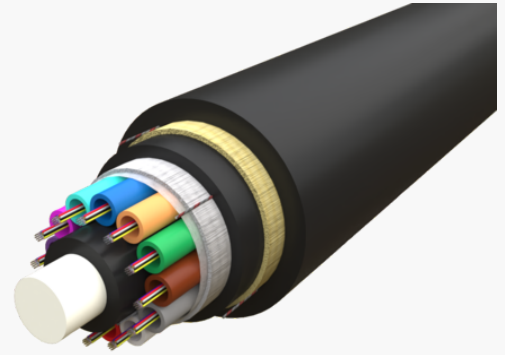

Product number	Product name	Fibre Count	Cable Diameter
4965677	24F G652D ADSS MLT Black HDPE 4.3kN OD 11,5mm 4km/dr	24	11.5 mm
4965687	48F G652D ADSS MLT Black HDPE 4.3kN OD 11,5mm 4km/dr	48	11.5 mm
4965697	96F G652D ADSS MLT Black HDPE 4.5kN OD 11,5mm 4km/dr	96	11.5 mm
4965707	144F G652D ADSS MLT Black HDPE 5kN OD 14mm 4km/dr	144	14 mm
4965717	192F G652D ADSS MLT Black HDPE 5.2kN OD 14,8mm 4km/dr	192	14.8 mm
4965727	288F G652D ADSS MLT Black HDPE 6.2kN OD 16,8mm 4km/dr	288	16.8 mm