


Fanout Singlemode G657A

Fibreoptic ribbon fanouts, singlemode G652A1 with pre-terminated connector. To be used for splicing on a fibreoptic ribbon cable. Halogen-free according to EN 60754-1/2 and flame retardant according to IEC 60332-2-2. Meets the requirements of IEC 61300, EN186000-1, EIA/TIA-455 and TELCORDIA GR-326-CORE/GR-63. ID marked with a unique serial number for full traceability to component-level. Each package comes with individual measurement protocols.

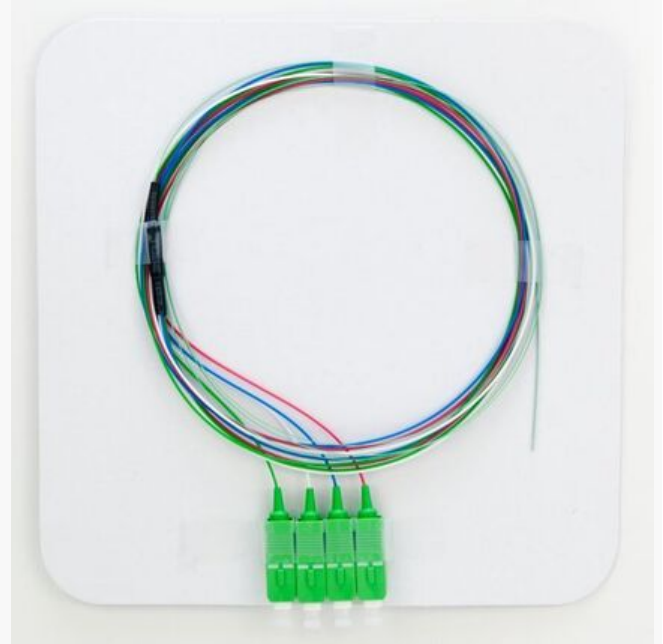

Product number	Product name	Connector Type	Fibre Count	Fibre Colour Sequence
5068826	Fanout SM 4xSC/UPC-APC-UPC-APC G657A 0.8+1.2m=2.0m S12 code	sc/upc & sc/apc	4	S12
5068827	Fanout SM 4xSC/UPC-UPC-APC-APC G657A 0.8+1.2m=2.0m S12 code	sc/upc & sc/apc	4	S12
5068828	Fanout SM 4xSC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/UPC	4	S12
5068829	Fanout SM 8xSC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/UPC	8	S12
5068830	Fanout SM 12xSC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/UPC	12	S12 & EIA/TIA-598A
5068831	Fanout SM 4xSC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/APC	4	S12
5068832	Fanout SM 8xSC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/APC	8	S12
5068833	Fanout SM 12xSC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	SC/APC	12	S12 & EIA/TIA-598A
5068834	Fanout SM 4xLC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/UPC	4	S12
5068835	Fanout SM 8xLC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/UPC	8	S12
5068836	Fanout SM 12xLC/UPC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/UPC	12	S12 & EIA/TIA-598A
5068837	Fanout SM 4xLC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/APC	4	S12
5068838	Fanout SM 8xLC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/APC	8	S12
5068839	Fanout SM 12xLC/APC G657A 2m G657A 0.8+1.2m=2.0m S12 code	LC/APC	12	S12 & EIA/TIA-598A
5069977	Fanout SM 2xSC/UPC G657A 2m G657A 0.8+1.2m=2m STD	SC/UPC	2	EIA/TIA-598A
5069978	Fanout SM 2xSC/APC G657A 2m G657A 0.8+1.2m=2.0m STD	SC/APC	2	EIA/TIA-598A