


Pigtails Singlemode G652D

Fibreoptic pigtail, singlemode G652D 900µm with one pre-terminated connector. To be used for splicing on a fibreoptic cable. Halogen-free according to EN 60754-1/2 and flame retardant according to IEC 60332-2-2. Meets the requirements of IEC 61300, EN186000-1, EIA/TIA-455 and TELCORDIA GR-326-CORE/GR-63. ID marked with a unique serial number for full traceability to component-level. Each package comes with individual measurement protocols. With pre-mounted 45 mm heat shrink sleeves.

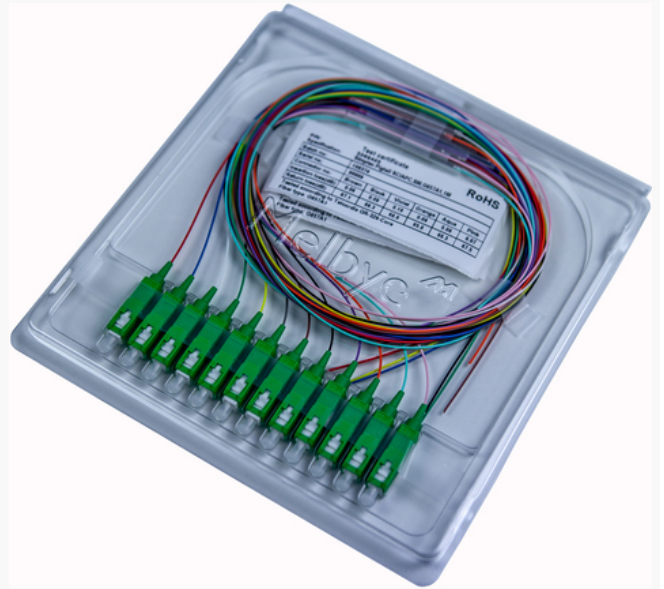

Product number	Product name	Connector Type	Fibre Type
5068400	Pigtail SM SC/UPC 1.0m 12-Pack G652D 12 color 900µm LSZH	SC/UPC	ITU-T G.652 D
5068401	Pigtail SM SC/APC 1.0m 12-Pack G652D 12 color 900µm LSZH	SC/APC	ITU-T G.652 D
5068402	Pigtail SM LC/UPC 1.0m 12-Pack G652D 12 color 900µm LSZH	LC/UPC	ITU-T G.652 D
5068403	Pigtail SM LC/APC 1.0m 12-Pack G652D 12 color 900µm LSZH	LC/APC	ITU-T G.652 D
5068408	Pigtail SM SC/UPC 1.0m 12-Pack G652D Blue 900µm LSZH	SC/UPC	ITU-T G.652 D
5068409	Pigtail SM SC/APC 1.0m 12-Pack G652D Blue 900µm LSZH	SC/APC	ITU-T G.652 D
5068410	Pigtail SM LC/UPC 1.0m 12-Pack G652D Blue 900µm LSZH	LC/UPC	ITU-T G.652 D
5068411	Pigtail SM LC/APC 1.0m 12-Pack G652D Blue 900µm LSZH	LC/APC	ITU-T G.652 D