


Cables for aerial installation (ULW)

Ultra-Lightweight (ULW) aerial cables are designed for overhead pole installation. But can also be installed underground in ducts by pulling. Cable parameters such as cable diameter, stiffness and tensile strength are optimized for best installation performance. Openreach PIA approved, suitable for use alongside 11kV power cables and with tensile breaking force for maximum security, less than 2000N.

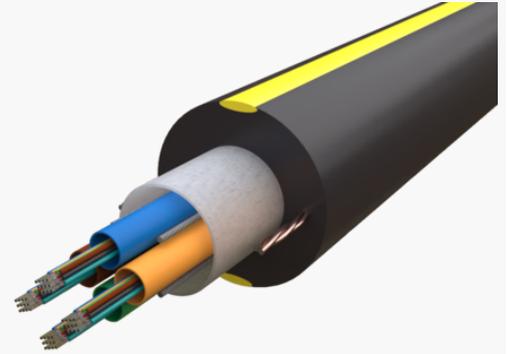

Product number	Product name	Fibre Count	Cable Diameter
MU1504004	4F G657A1 ULW overhead OFC micromodule Black/Yellow OD 7mm 4km/dr	4	7 mm
MU1512000	12F G657A1 ULW overhead OFC micromodule Black/Yellow OD 7mm 4km/dr	12	7 mm
MU1524001	24F G657A1 ULW overhead OFC micromodule Black/Yellow OD 7mm 4km/dr	24	7 mm
MU1536002	36F G657A1 ULW overhead OFC micromodule Black/Yellow OD 7mm 4km/dr	36	7 mm
MU1548003	48F G657A1 ULW overhead OFC micromodule Black/Yellow OD 7mm 4km/dr	48	7 mm
MU1596005	96F G657A1 200 ULW overhead OFC micromodule Black/Yellow OD 7mm 2km/dr	96	7 mm