


Product name	2F Blown fiber EPSU MM OM1 Orange HDPE 1,2mm 2km/pan, S12
Product code	5044410
GTIN	7332811321733
ETIM-Class	EC000034

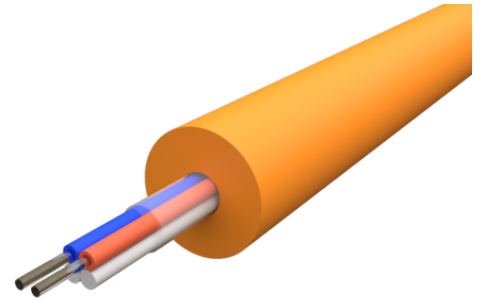

## PRODUCT SPECIFICATIONS

2F OM1 EPSU air blown optical fibre is typically used in micro duct installation applications. ABF can utilize in existing and new duct systems more effectively by accommodating more fibres in given subduct network. The fiber units is suitable for air-blown installation. Cable parameters such as cable diameter, stiffness and sheath friction is optimized for best installation performance.

The expected service life in normal use exceeds 30 years.

## Measurements

Length	1,000 mm
Height	1.2 mm
Width	1.2 mm
Weight	1.4 g

## Physical Characteristics

Fibre Count	2
Cable Construction	Acrylat
Fibre Type	OM1
Fibre Colour Sequence	S12
Tube Size	
Outer Sheath Material	HDPE (High Density Polyethylene)
Colour of Cable Sheath	Orange

## Nominal Sheath Thickness

Cable Diameter	1.2 mm
Cable Diameter Tolerance	+/- 0.2 mm
Nominal Cable Weight	1.4 kg/km

## Mechanical &amp; Environmental Characteristics

Halogen Free	Yes
Metal free	Yes
Tensile Strength (N) IEC-60794-1-21-E1	13 N
Crush Resistance - IEC- 60794-1-21-E3	100 N/10cm
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	40 mm
Temperature Performance Installation IEC-60794-1-22-F1	-15°C till +50°C*
Temperature Performance Operation IEC-60794-1-22-F1	-40°C till +60°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C till +60°C