


Product name	96F G652D MLT CST armored 10kN Black HDPE OD 16,5mm 4000m/dr
Product code	87405097
GTIN	7332811136177
ETIM-Class	EC000034

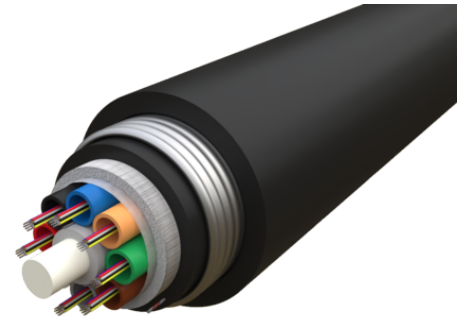

## PRODUCT SPECIFICATIONS

96F G652D armored cables designed for direct burial installation and has full rodent protection. It attains its mechanical robustness and functional performance through its double sheath and corrugated steel tape (CST) reinforcement. Needs no further protection at underground installations. The cable is based on a multi loose tube construction with SZ design around a central strength member of fiberglass-reinforced plastic (FRP) which facilitates mid-span access.

## Measurements

Length	1,000 mm
Height	16.5 mm
Width	16.5 mm
Weight	246 g

## Physical Characteristics

Fibre Count	96
Cable Construction	Multi Loose Tube (MLT)
Fibre Type	ITU-T G.652 D
Fibres per Tube	12
Fibre Colour Sequence	EIA/TIA-598A
Tube Size	2.3 mm
Central Strength Member	FRP
No of Tubes	8

Tube Colour Sequence	EIA/TIA-598A
Outer Sheath Material	HDPE (High Density Polyethylene)
Double Sheath	Yes
Colour of Cable Sheath	Black
Nominal Sheath Thickness	1.5 mm
No of Ripcords Below Outer Sheath	2
Cable Diameter	16.5 mm
Cable Diameter Tolerance	+/- 0.5 mm
Nominal Cable Weight	240 kg/km

## Mechanical & Environmental Characteristics

Halogen Free	Yes
UV Proof	Yes
Metal free	No
Tensile Strength (N) IEC-60794-1-21-E1	4,500 N
Crush Resistance - IEC- 60794-1-21-E3	10,000 N/10cm
Impact Strength (Nm) IEC-60794-1-21-E4	3
Torsion IEC-60794-1-21-E7	±180°
Min. Bend Radius (During Installation) IEC-60794-1-21-E11	25 x d
Min. Bend Radius (After Installation) IEC-60794-1-21-E11	20 x d
Water Penetration Test IEC-60794-1-22-F5	1m waterhead, 3m samples, 24 h
Drip Test IEC-60794-1-21-E14	30 cm, 70°C, 24 h
Temperature Performance Installation IEC-60794-1-22-F1	-15°C to +50°C
Temperature Performance Operation IEC-60794-1-22-F1	-40°C to +70°C
Temperature Performance Storage IEC-60794-1-22-F1	-40°C to +70°C